

Item # _____

Quantity _____

Heated Cabinets With Universal Ledges

Insulated and Non-insulated Stainless Steel

All purpose heated holding for cooked foods.

- Durable welded stainless steel construction.
- Heavy-duty blower distributes hot air evenly throughout the cabinet.
- Heat controls are conveniently located on the outside of the cabinet.
- Full-pan top and bottom design provide added durability during offsite transport.
- Accommodates 20" x 22", 18" x 26" and 14" x 18" trays/pans.
- Single door and double dutch door versions are available.
- Can be used with or without humidity.
- Heating unit is removable for easy cleaning.
- NSF and UL listed.



Model 16549



Adjustable Tray Ledges

General Specifications

Shall be of stainless steel construction, to hold 20" x 22" (510 x 560 mm), 18" x 26" (457 x 660 mm) and 14" x 18" (356 x 457 mm) pans and trays. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing plates at corners. *Insulated Models:* High density fiberglass insulation throughout; top, back, bottom, sides, and door(s). *Non-insulated Models:* High density fiberglass insulated door. Door shall be attached to cabinet with heavy-duty lift-off hinges, which provide for 270° swing and be held open by magnetic door latch. Each door has paddle latch. Cabinet has recessed handles. Bottom corner bumpers shall be standard. Polyurethane tire casters in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge caster mounting plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit. Unit shall have removable heating unit (120 VAC, 15.4 amp, 1850 watts, 5-20P NEMA plug) with control for heat setting. Control shall be easily accessed from the front without opening the door. Heating unit shall also feature a water reservoir.

Spec. #

AIA#




Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Heated Cabinets With Universal Ledges Insulated and Non-insulated Stainless Steel

Spec.#

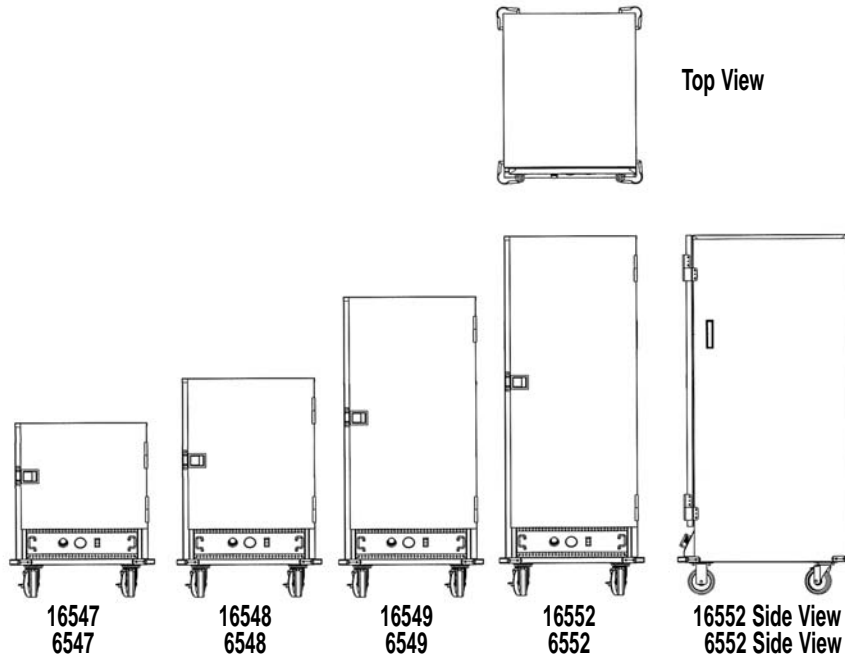

Dimensions

Insulated Models

Models	Pan Capacity		Ledge Spacing	Door Type	Overall Size			Case Weight Lbs. (kg)
	Full Size	Half Size			W	D	H	
16547	4	8	4.5" (114)	Single	28" (711)	34" (864)	33" (838)	190 (86)
16548	6	12	4.5" (114)	Single	28" (711)	34" (864)	42" (1067)	250 (114)
16549	10	20	4.5" (114)	Single	28" (711)	34" (864)	60" (1524)	280 (127)
16552	12	24	4.5" (114)	Single	28" (711)	34" (864)	69" (1753)	310 (141)

Non-insulated Models

Models	Pan Capacity		Ledge Spacing	Door Type	Overall Size			Case Weight Lbs. (kg)
	Full Size	Half Size			W	D	H	
6547	4	8	4.5" (114)	Single	27.75" (705)	34" (864)	33" (838)	150 (68)
6548	6	12	4.5" (114)	Single	27.75" (705)	34" (864)	42" (1067)	190 (86)
6549	10	20	4.5" (114)	Single	27.75" (705)	34" (864)	60" (1524)	250 (114)
6552	12	24	4.5" (114)	Single	27.75" (705)	34" (864)	69" (1753)	270 (128)

Options

- Full Perimeter Bumper
- All Swivel Lake Glide Casters
- Floor Lock Centered (6" Casters)
- Additional Tray Slides
- Transport Latch
- Magnetic Latch
- Dutch Doors (Models 16552 and 6552)
- Clear Polycarbonate Door
- Vented Doors (single door only)
- Left-Hand Door Hinging
- Voltage 220 Volt, 50/60 Hz, Single Phase
- Transport Package

Universal Slides Accommodate The Following Per Slide:

- 1 ea. 18" x 26" Pan
- 1 ea. 15" x 20" Tray
- 1 ea. 16" x 22" Tray
- 1 ea. 20" x 22" Pan
- 2 ea. 14" x 18" Pan
- 2 ea. 13" x 18" Pan
- 2 ea. 12" x 20" Pan (3" Deep)

Measurements in () denote metric millimeters, unless otherwise specified.

AIA#



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com