

Drop-in Self-Leveling Dispensers

Open, Shielded and Heated

Dispensing level is easily adjusted by attaching or detaching springs. No tools required.

- Models available to fit plates from 5" (127 mm) to 12 1/4" (311 mm).
- All models have a 26" (660) stacking capacity.
- Easy-Glide™ design provides quiet, non-stick operation.
- Heated dispensers feature thermostatic control. Thermostat minimum 100°F (38°C) - maximum 180°F (82°C).
- High-strength stainless steel frame.



Specifications

Unit shall be of welded stainless steel construction. Dispensers shall hang from surface opening by an 18-gauge flange ring and feature three each 22-gauge vertical side supports welded to 20-gauge bottom plate. Self-leveling dish carriage shall be of welded stainless steel construction and shall travel vertically in dispenser tube with nylon guides for smooth operation. Carriage shall have 22-gauge removable dish platform. Unit shall feature flange mounted perimeter extension springs, which are detachable from the dish carriage to provide adjustment without tools for different weight dishes. Unit shall have a vertical stacking capacity of 26" (660)

Optional Accessories

- Stainless steel dispenser tube covers
- 208/240 VAC 60Hz (heated models)
- 220 VAC 50 Hz (heated models)




Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Drop-in Self-Leveling Dispensers

Open, Shielded and Heated

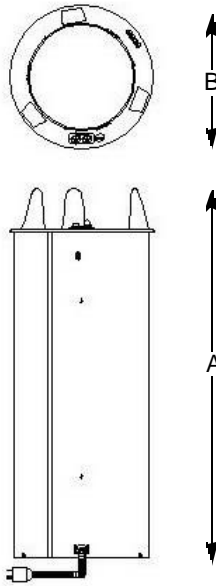

Specification sheets available at www.eLakeside.com

Dimensions

Model	Accommodates Plate Size		Height to Ring (A)		Diameter (B)		Counter Cut Out Size		Electrical		Shipping Weight	
	Inches (In.)	Millimeters (mm)	In.	mm	In.	mm	In.	mm	Wattage	Amps	lb.	kg.
Open Models												
4000	Up to 5"	Up to 127	27-1/4"	692	8-1/4"	210	7-7/16"	189	--	--	10	4.5
4005	5-1/8" to 5-3/4"	130 to 146	27-1/4"	692	9"	229	8-3/16"	208	--	--	11	4.9
4006	5-7/8" to 6-1/2"	149 to 165	27-1/4"	692	9-3/4"	248	8-15/16"	227	--	--	12	5.4
4007	6-5/8" to 7-1/4"	168 to 184	27-1/4"	692	10-1/2"	267	9-11/16"	246	--	--	12	5.4
4008	7-3/8" to 8-1/8"	200 to 206	27-1/4"	692	11-3/8"	289	10-9/16"	268	--	--	12	5.4
4009	8-1/4" to 9-1/8"	210 to 232	27-1/4"	692	12-3/8"	314	11-9/16"	294	--	--	15	6.8
4010	9-1/4" to 10-1/8"	235 to 257	27-1/4"	692	13-3/8"	340	12-9/16"	319	--	--	16	7.3
4012	10-1/4" to 12-1/4"	260 to 311	27-1/4"	692	15-7/8"	403	14-11/16"	373	--	--	18	8.2
Shielded Models												
5000	Up to 6"	Up to 127	28"	711	8-1/4"	210	7-7/16"	189	--	--	15	6.8
5005	5-1/8" to 5-3/4"	130 to 146	28"	711	9"	229	8-3/16"	208	--	--	16	7.3
5006	5-7/8" to 6-1/2"	149 to 165	28"	711	9-3/4"	248	8-15/16"	227	--	--	17	7.7
5007	6-5/8" to 7-1/4"	168 to 184	28"	711	10-1/2"	267	9-11/16"	246	--	--	18	8.2
5008	7-3/8" to 8-1/8"	200 to 206	28"	711	11-3/8"	289	10-9/16"	268	--	--	20	9.1
5009	8-1/4" to 9-1/8"	210 to 232	28"	711	12-3/8"	314	11-9/16"	294	--	--	23	10.4
5010	9-1/4" to 10-1/8"	235 to 257	28"	711	13-3/8"	340	12-9/16"	319	--	--	24	10.9
5012	10-1/4" to 12-1/4"	260 to 311	28"	711	15-7/8"	403	14-11/16"	373	--	--	29	13.2
Heated Models												
6006	5-7/8" to 6-1/2"	149 to 165	28"	711	9-3/4"	248	8-15-16"	227	300	2.5	20	9.1
6007	6-5/8" to 7-1/4"	168 to 184	28"	711	10-1/2"	267	9-11/16"	246	300	2.5	21	9.5
6008	7-3/8" to 8-1/8"	200 to 206	28"	711	11-3/8"	289	10-9/16"	268	300	2.5	23	10.4
6009	8-1/4" to 9-1/8"	210 to 232	28"	711	12-3/8"	314	11-9/16"	294	450	3.8	26	11.8
6010	9-1/4" to 10-1/8"	235 to 257	28"	711	13-3/8"	340	12-9/16"	319	450	3.8	28	12.7
6012	10-1/4" to 12-1/4"	260 to 311	28"	711	15-7/8"	403	14-11/16"	373	450	3.8	32	14.5

Measurements in () denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com