

Open Pan & Tray Racks

Aluminum

**Models 8522, 8528, 5829
8547, 8559**

Durable, Efficient Storage System With All-Welded Aluminum Construction

Benefits

- Light-weight aluminum is rust-proof
- Welded construction

Features


- Channel and angle style ledges are continuously welded to the uprights to withstand rugged use.
- Reinforced bottom design provides added durability during offsite transport.
- Accomodates 18" x 26" or 14" x 18" pans and trays.
- NSF listed.

Casters

- Heavy-duty 5" plate-mount with non-marking poly wheels



Model 8528

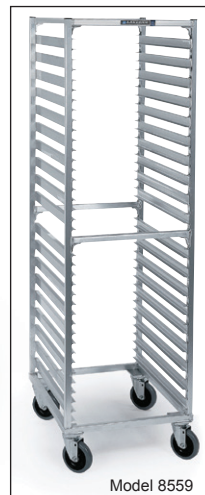

Model 8559



Specifications:

Shall be constructed of hi-tensile, corrosion-resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy. All seams shall be heli-arc welded and sealed (no rivets). Tray ledges 1- $\frac{1}{4}$ " x 1- $\frac{5}{8}$ " x .100 extruded aluminum welded to frame on 3" or 5" centers, with channel type ledges to be on 1 $\frac{1}{2}$ " centers. Unit shall have four horizontal supports located at the top and center of 1" x 1" x .070 wall aluminum tube. Corner gussets of 1- $\frac{1}{2}$ " x 1- $\frac{1}{2}$ " x $\frac{5}{8}$ " thick angle shall be welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights with a 4 $\frac{1}{2}$ " continuous weld. Unit base shall be constructed of 1" x 1" x .070 wall tube welded into a rectangular frame (20- $\frac{1}{2}$ " x 26"), with two extra laterals where caster mount reinforcement plates shall be inset. reinforcement caster plates (2- $\frac{3}{4}$ " x 4" x $\frac{3}{8}$ "), pre-tapped for $\frac{1}{4}$ " bolts, shall be welded to this frame. Casters shall be plate mount type, with 5" diameter non-marking polyurethane wheel, full swivel design with sealed ball bearing races.

Spec. # _____

AIA # _____

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@elakeside.com • www.eLakesideFoodservice.com

Open Pan & Tray Racks

Aluminum

Models

8522

8528


5829

8547

8559

Spec. #

AIA #

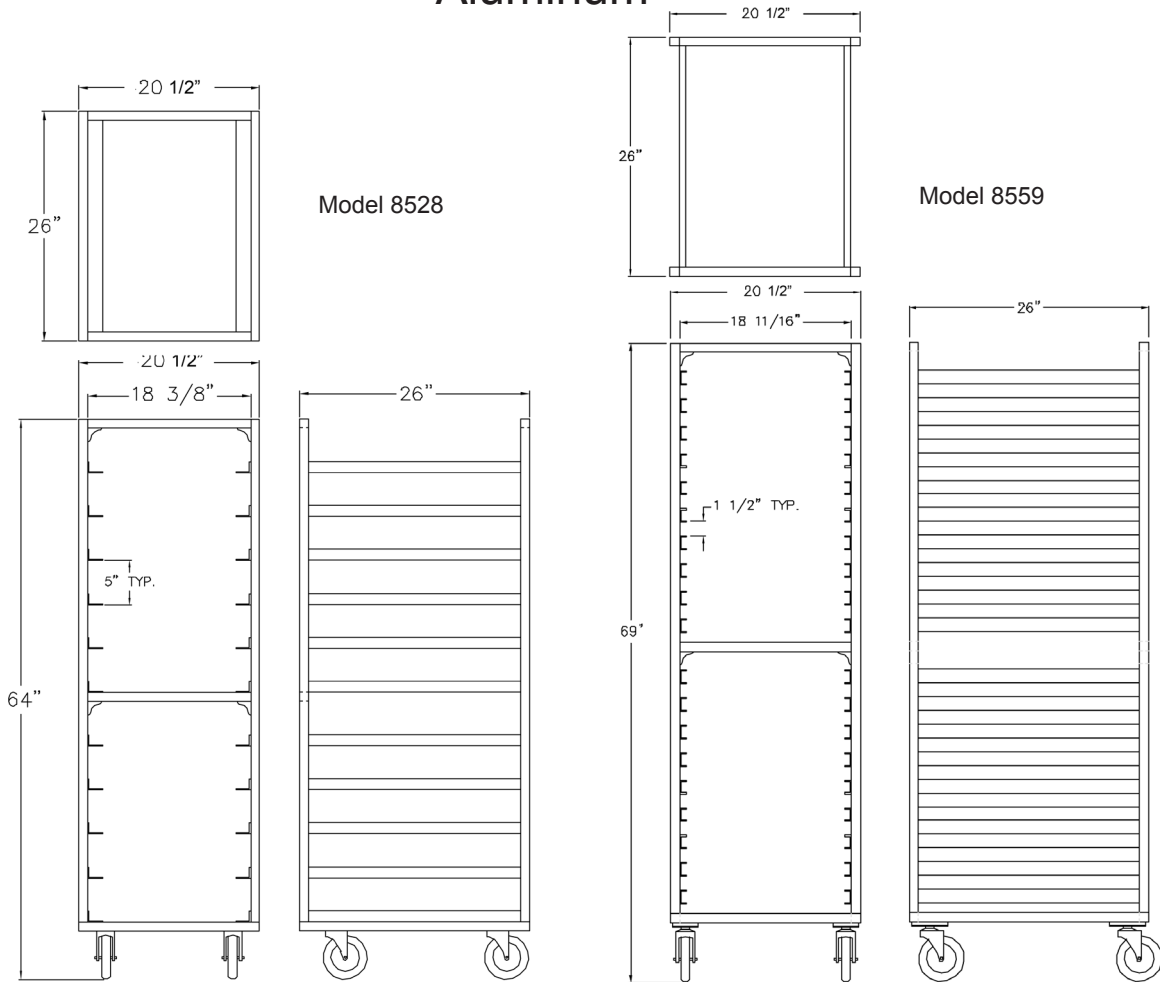

Model Information:

Model	Pan/Tray Capacity		Ledge		Overall Size			Case Wt. Lbs.
	Full Size	Half Size	Type	Spacing	W	L	H	
8522	18	36	Angle	3" (76)	20½" (521)	26" 660	63" 1600)	42 (18.9 kg)
8528	11	22	Angle	5" (127)	20½" (521)	26" 660	64" 1626)	38 (17.1 kg)
8529	18	36	Angle	3" (76)	20½" (521)	26" 660	64" 1626)	48 (21.6 kg)
8547	34	68	Channel	1½" (38)	20½" (521)	26" 660	64" 1626)	53 (23.9 kg)
8559	38	76	Channel	1½" (38)	20½" (521)	26" 660	69" 1753)	56 (25.2 kg)

Dimensions in () denote metric millimeters, unless otherwise noted.

Options:

- ☐ Break casters (set of 2)
- ☐ Perimeter bumper
- ☐ Vertical leg bumpers (set of 4)
- ☐ Pan stop
- ☐ Bottom corner bumpers (set of 4)
- ☐ Solid sheet base



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@elakeside.com • www.eLakesideFoodservice.com